

TEXAS




INDIVIDUAL COLOUR

14W/m · IP65 · 230V · CRI>80

|         |           |               |
|---------|-----------|---------------|
| Power   | Life Time | PCB Thickness |
| 14 W/m  | 75.000 h  | 3 oz          |
| Voltage | CRI       | SDMC          |
| 230V    | >80       | ≤3            |

| Code  | CCT (K) | Lumen output | Lm/W     |
|-------|---------|--------------|----------|
| 84120 | Red     | 343 Lm/M     | 25 Lm/W  |
| 84121 | Blue    | 252 Lm/M     | 18 Lm/W  |
| 84122 | Green   | 1820 Lm/M    | 130 Lm/W |
| 84123 | Yellow  | 1442 Lm/M    | 103 Lm/W |
| 84124 | Pink    | 861 Lm/M     | 62 Lm/W  |

|         |        |           |             |
|---------|--------|-----------|-------------|
| LED SMD | 50 m   | 120 LED/m | IP 65       |
| 2835    |        |           |             |
| Test    | 100 mm | 120°      | Non Flicker |
| LM 80   |        |           |             |

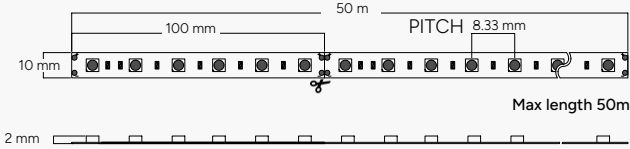

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

3YEAR GUARANTEE

-20 / +50

Dimmable

CE

UL

ETL US

RoHS

Connection Kit

80054

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

Compatible / Compatibile

No compatible / Not compatible / Non compatible / Non compatibile