


JACKSON 

15W/m · IP67 · 24V · CRI>90

Power	Life Time	PCB Thickness		Code	CCT (K)	Lumen output
15 W/m	75.000 h	3 oz		84170	 2700K	375 Lm/M
Voltage	CRI	SDMC		84171	 3000K	450 Lm/M
				84172	 4000K	500 Lm/M
				84173	 6000K	525 Lm/M
24V	>90	≤3				

LED SMD
2835

 30 m

 140 LED/m


IP
67

 Silicone

 50 mm

 120°

Non
Flicker

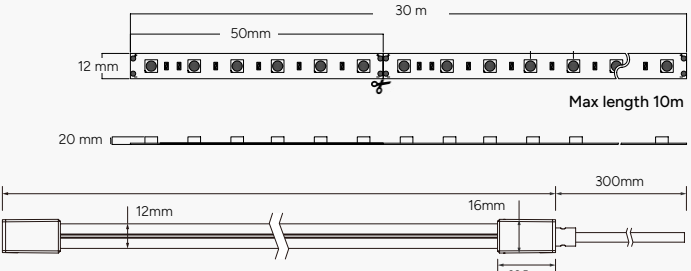

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

 3 YEAR
GUARANTEE



 -20 / +50

 Dimmable


















Dimension





Minimum Diam
300mm


Light Beam

ACCESORIES


Code	Description
84163	Perfil recto 1 m / Straight profile 1 m / Profilé droit 1 m
84164	Clip de sujeción / Support clip / Clip support
84165	Tapa final / End cap / Embout de fermeture finale
84166	Tapa inicial / Initial cover / Embout de fermeture initiale
84167	Tapa inicial lateral / Side initial cover / Embout de fermeture initiale latérale




JACKSON




84163




84164



84165



84166



84167