

DALLAS




15W/m · IP67 · 230V · CRI>80

Power	Life Time	PCB Thickness
15W/m	75.000 h	3 oz
Voltage	CRI	SDMC
230V	>80	≤3

Code	CCT (K)	Lumen output	Lm/W
83880	2700K	1455 Lm/M	97 Lm/W
83881	3000K	1485 Lm/M	99 Lm/W
83882	4000K	1515 Lm/M	101 Lm/W
83883	6000K	1545 Lm/M	103 Lm/W

LED SMD	50 m	120 LED/m	IP 67
2835			
Test LM 80	50 mm	120°	

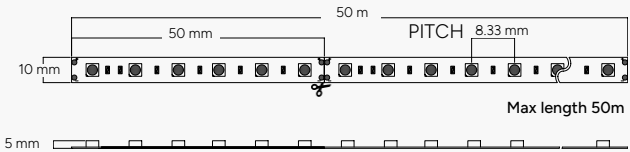

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore



RIAD	DOHA	LEON	VILNA	MUNICH	MONACO	NAPOLIS	NAGOYA	BAKU
BUSAN	MUMBAI	QUEBEC	ARGEL	NILO	GANGES	TURIA	TAJO	XINGU
CANTON	VICTORIA	LYON	TURIN	RIGA	ESSEN	LAGOS	GLASGOW	ROMA
LEEDS	UTENA	MONTREAL	RECIFE	EBRO	BURDEOS	HANOI	KAUNAS	KUWAIT
YEDA	TALLIN	DAKAR	BASILEA	MONTERREY	HARBIN	ZURICH	ULSAN	LINZ
PERTH	DELHI	VOLGA	BRAVO	ANKARA	LIEJA	VALENCIA	LUGO	HEFEI
SURAT	CALCUTA	BERNA	BURSA	BARİ	CALGARY	BONN	VARNA	MURCIA
COLONIA	SENA	BREMEN	MACAU	TIGRIS	SEVILLA	OSLO	NANTES	NIZA
HAIFA	BANGKOK	ATLANTA						

Compatible / Compatibile

No compatible / Not compatible / Non compatible / Non compatibile