

DAKOTA

14.4W/m · IP67 · 24V · CRI>80

			Code	CCT (K)	Lumen output		Lm/W
Power 14.4 W/m	Life Time 75.000 h	PCB Thickness 3 oz	84035	2900-3200K	1120 Lm/M	78	Lm/W
			84036	2200-2400K	980 Lm/M	68	Lm/W
			84037	2600-2900K	980 Lm/M	68	Lm/W
			84038	3700-4250K	1120 Lm/M	78	Lm/W
Voltage 24V	CRI >80	SDMC ≤3	84039	3200-3850K	980 Lm/M	68	Lm/W
			84040	1800-2000K	700 Lm/M	49	Lm/W

LED SMD
2835

20 m

140 LED/m


IP
67

Test
LM 80

50 mm

120°

Non
Flicker

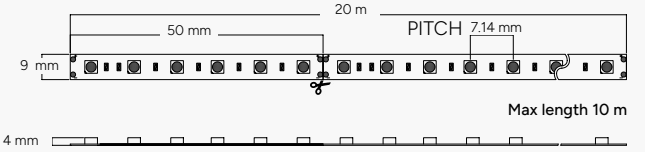

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore



RIAD	DOHA	LEON	VILNA	MUNICH	MONACO	NAPOLIS	NAGOYA	BAKU
BUSAN	MUMBAI	QUEBEC	ARGEL	NILO	GANGES	TURIA	TAJO	XINGU
CANTON	VICTORIA	LYON	TURIN	RIGA	ESSEN	LAGOS	GLASGOW	ROMA
LEEDS	UTENA	MONTREAL	RECIFE	EBRO	BURDEOS	HANOI	KAUNAS	KUWAIT
YEDA	TALLIN	DAKAR	BASILEA	MONTERREY	HARBIN	ZURICH	ULSAN	LINZ
PERTH	DELHI	VOLGA	BRAVO	ANKARA	LIEJA	VALENCIA	LUGO	HEFEI
SURAT	CALCUTA	BERNA	BURSA	BARİ	CALGARY	BONN	VARNA	MURCIA
COLONIA	SENA	BREMEN	MACAU	TIGRIS	SEVILLA	OSLO	NANTES	NIZA
HAIFA	BANGKOK	ATLANTA						

Compatible / Compatible No compatible / Not compatible / Non compatible / Non compatibile