

VIRGINIA

RGB

14.4W/m · IP67 · 24V · CRI>80

Power	Life Time	PCB Thickness	Code	CCT (K)	Lumen output
14.4 W/m	75.000 h	3 oz	84046	 RGB	600 Lm/M
Voltage	CRI	SDMC			
24V	>80	≤3			

LED SMD
5050 RGB

 20 m

 60 LED/m


IP
67

 RGB

 100 mm

 120°

Non
Flicker

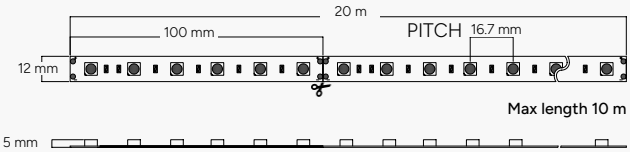

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

 -20 / +50



 RIAD	 DOHA	 LEON	 VILNA	 MUNICH	 MONACO	 NAPLES	 NAGOYA	 BAKU
 BUSAN	 MUMBAI	 QUEBEC	 ARGEL	 NILO	 GANGES	 TURIA	 TAJO	 XINGU
 CANTON	 VICTORIA	 LYON	 TURIN	 RIGA	 ESSEN	 LAGOS	 GLASGOW	 ROMA
 LEEDS	 UTENA	 MONTREAL	 RECIFE	 EBRO	 BURDEOS	 HANOI	 KAUNAS	 KUWAIT
 YEDA	 TALLIN	 DAKAR	 BASILEA	 MONTERREY	 HARBIN	 ZURICH	 ULSAN	 LINZ
 PERTH	 DELHI	 VOLGA	 BRAVO	 ANKARA	 LIEJA	 VALENCIA	 LUGO	 HEFEI
 SURAT	 CALCUTA	 BERNA	 BURSA	 BARI	 CALGARY	 BONN	 VARNA	 MURCIA
 COLONIA	 SENA	 BREMEN	 MACAU	 TIGRIS	 SEVILLA	 OSLO	 NANTES	 NIZA
 HAIFA	 BANGKOK	 ATLANTA						

 Compatible / Compatibile

 No compatible / Not compatible / Non compatible / Non compatibile