

MICHIGAN




14.4W/m · IP20 · 24V · CRI>80



Power	Life Time	PCB Thickness	Code	CCT (K)	Lumen output	Lm/W
14.4 W/m	75.000 h	3 oz	84074	2700K	1296 Lm/M	90 Lm/W
Voltage	CRI	SDMC	84075	3000K	1368 Lm/M	95 Lm/W
24V	>80	≤3	84076	4000K	1440 Lm/M	100 Lm/W

LED SMD			IP
2835	30 m	60 LED/m	20
Test			Non
LM 80	100 mm	120°	Flicker

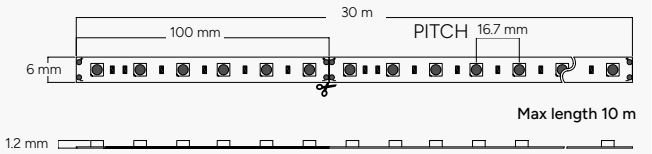

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore



Compatible / Compatibile No compatible / Not compatible / Non compatible / Non compatibile