

CALIFORNIA

12W/m · IP67 · 24V · CRI>90

			Code	CCT (K)	Lumen output	Lm/W
Power 12 W/m	Life Time 75.000 h	PCB Thickness 3 oz	84088	● 2700K	1050 Lm/M	88 Lm/W
			84089	● 3000K	1120 Lm/M	93 Lm/W
Voltage 24V	CRI >90	SDMC ≤3	84090	○ 4000K	1200 Lm/M	100 Lm/W
			84091	● 6000K	1280 Lm/M	106 Lm/W

LED
COB



20 m

480 LED/m



Silicone




50 mm



120°

IP
67

Non
Flicker

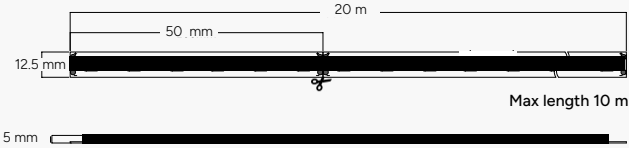

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

3YEAR
GUARANTEE

TEST
LM 80



-20 / +50



Dimmable



RoHS



CE



UL



ETL



Recycling



RoHS



Waste

 Compatible / Compatibile

 No compatible / Not compatible / Non compatible / Non compatibile