


AURA

8W/m · IP67 · 24V · CRI>90

Power	Life Time	PCB Thickness		Code	CCT (K)	Lumen output	
8 W/m	75.000 h	3 oz		84390	2700K	520	Lm/M
Voltage	CRI	SDMC	Vertical Bending	84391	3000K	560	Lm/M
				84392	4000K	580	Lm/M
				84393	6000K	600	Lm/M
24V	>90	≤3					

LED SMD

2219



30 m



240 LED/m

IP

67

Test

LM 80




25 mm



120°

Non

Flicker

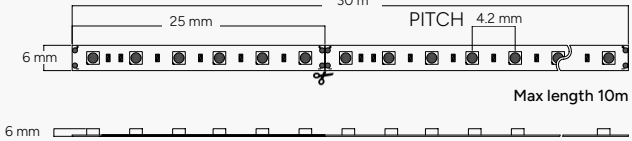

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore







-20 / +50



Dimmable



10 Year Limited Warranty




















ACCESORIES


Code	Description
84403	Perfil recto 1 m / Straight profile 1 m / Profilé droit 1 m
84402	Clip de montaje / Mounting clip / Clip de montage / Clip di montaggio
84400	Tapa inicial / Initial cover / Embout de fermeture initiale
84401	Tapa final / End cap / Embout de fermeture finale




AURA




84403



84402



84401



84400