

# MISURI


14.4W/m · IP20 · 24V · CRI>80

Power 14.4 W/m  
Life Time 75.000 h  
PCB Thickness 3 oz  
Voltage 24V  
CRI >80  
SDMC ≤3

Code	CCT (K)	Lumen output	Lm/W	M
84941	2700K	1325 Lm/M	92 Lm/W	1 m/L
84942	3000K	1354 Lm/M	94 Lm/W	
84943	4000K	1397 Lm/M	97 Lm/W	
84944	6000K	1440 Lm/M	100 Lm/W	
84946	2700K	1325 Lm/M	92 Lm/W	5 m Roll
84947	3000K	1354 Lm/M	94 Lm/W	
84948	4000K	1397 Lm/M	97 Lm/W	
84949	6000K	1440 Lm/M	100 Lm/W	

LED SMD 2835	5-30 m	120 LED/m	<b>IP 20</b>	
Test LM 80	50 mm	120°	Non Flicker	

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

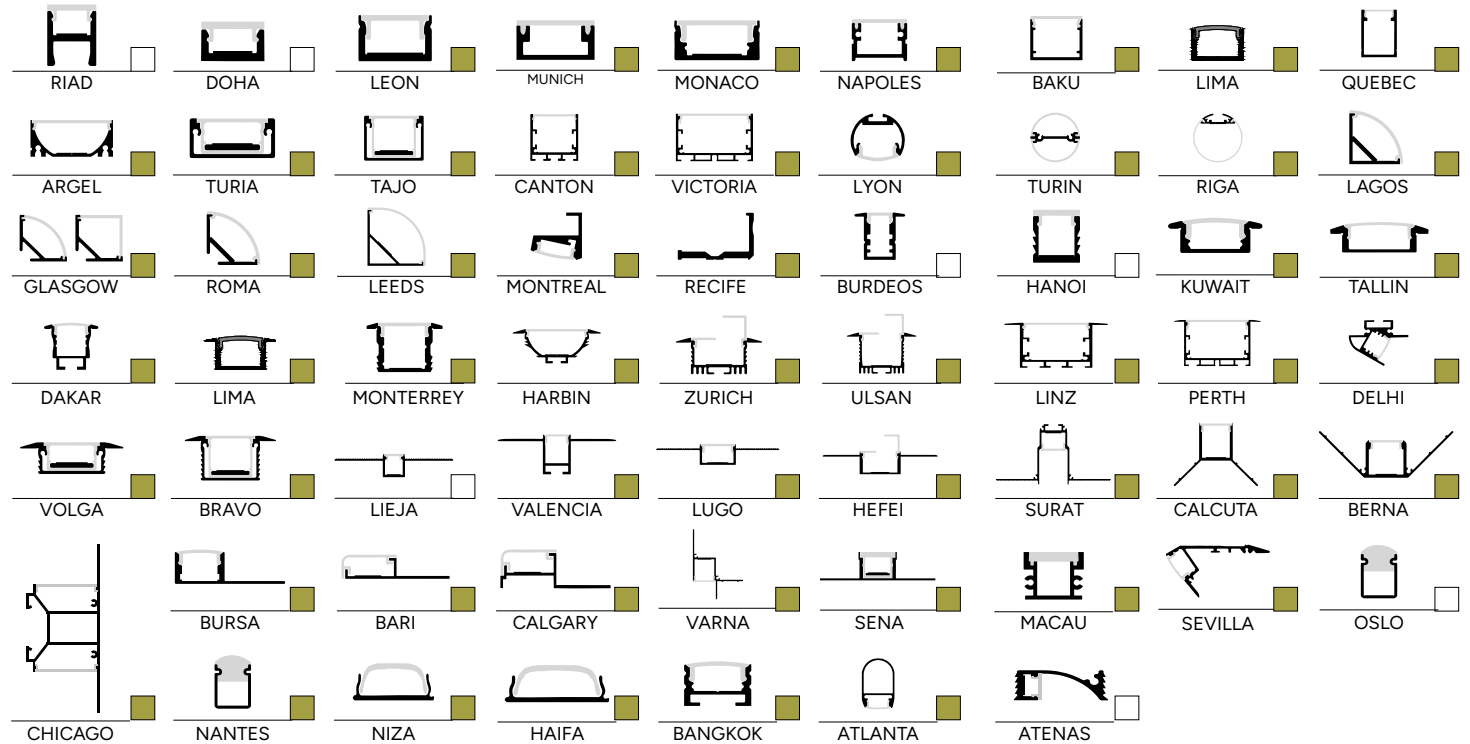

\*m/L: Lineal meter

Compatible / *Compatibile* No compatible / *Not compatible / Non compatible / Non compatibile*