

OREGÓN

12W/m · IP67 · 24V · CRI>80

Power	Life Time	PCB Thickness	Code	CCT (K)	Lumen output	Lm/W
12 W/m	75.000 h	3 oz	86034	 2700K	1560 Lm/M	130 Lm/W
			80035	 3000K	1600 Lm/M	133 Lm/W
Voltage	CRI	SDMC	80036	 4000K	1640 Lm/M	136 Lm/W
24V	>80	≤3	80037	 6000K	1680 Lm/M	140 Lm/W

LED SMD
2835

 20 m

 112 LED/m


IP
67

 Silicone

 62.5 mm

 120°

Non
Flicker

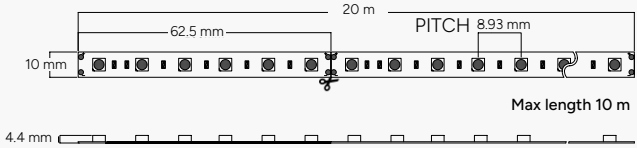

Importante instalar disipador de calor / Important to install heat sink / Important d'installer le dissipateur de chaleur / Importante installare il dissipatore di calore

3YEAR
GUARANTEE

TEST
LM 80

 -20 / +50

 Dimmable

 RoHS





 CE






 UL






 EneC



 RoHS










































 Compatible / Compatibile

 No compatible / Not compatible / Non compatible / Non compatibile